



产品技术说明书


Product technical specification

一. 产品描述 Product Description

P5130泡棉双面胶带是以EVA泡棉为基材，双面涂布高性能丙烯酸压敏胶，复合离型膜/离型纸制作而成。其具有优异的耐候性能、耐化学性、缓冲性、密封性和优越的粘接性。

P5130 double-sided foam tape is made of EVA foam as the base material, double-sided coating of high-performance acrylic pressure-sensitive adhesive, and composite release film/release paper. It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

二. 产品结构 Product structure

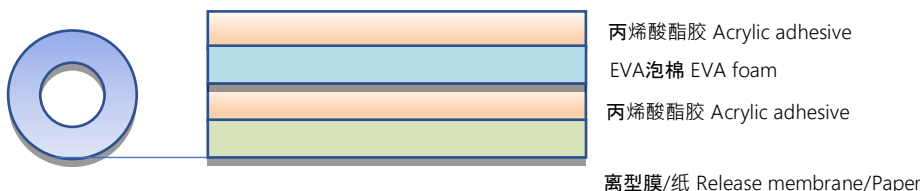

三. 主要用途 Main Use

✧ 可用于手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜。

Can be used in mobile phones, computers, digital cameras, mechanical panels, membrane switches, and AR glasses.

✧ 可用于汽车行业：外观装饰条、汽车零部件、汽车车标、汽车摆件。家居：挂钩、家具、玩具、工艺品。

Can be used in the automotive industry: exterior decorative strips, auto parts, auto logos, auto ornaments. Home: hooks, furniture, toys, handicrafts.

四. 产品特性 Product Features

- 具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

五. 典型性能 Typical performance

项目 Test items	典型值 Typical value	单位 Unit	测试方式 Test method
颜色 color	灰白黑 gray white black	-	目测 Visual inspection
胶系 Type of glue	丙烯酸酯 Acrylate adhesive	-	-
基材 Base material	EVA 泡棉 EVA foam	-	-
总厚度 Total thickness	0.3	mm	ASTM D-3652
剥离强度 (180° Peel strength)	16	N/inch	ASTM D-3330
保持力 Retentivity	>24	h	ASTM D-3654
长期耐温性 Long term temperature resistance	40	°C	GB / T4851 - 2014
短期耐温性 Short term temperature resistance	60	°C	GB / T4851 - 2014

六. 产品规格 Product specifications

- 800mm*33m
- 或其他定制

Other customization

七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，防止包装破损，避免与挥发性溶剂放在一起。存储温度为4~26℃，湿度为40~50%。

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. Suggestion storage temperature is 4~26 °C, and the suggestion humidity is 40~50%.

为保持最佳性能，本品应在生产之日起6个月内使用。

To maintain the best performance, this product should be used within 6months from the date of production.



产品技术说明书

Product technical specification

一. 产品描述 Product Description

P5150泡棉双面胶带是以EVA泡棉为基材，双面涂布高性能丙烯酸压敏胶，复合离型膜/离型纸制作而成。其具有优异的耐候性能、耐化学性、缓冲性、密封性和优越的粘接性。

P5150 double-sided foam tape is made of EVA foam as the base material, double-sided coating of high-performance acrylic pressure-sensitive adhesive, and composite release film/release paper. It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

二. 产品结构 Product structure



三. 主要用途 Main Use

✧ 可用于手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜。

Can be used in mobile phones, computers, digital cameras, mechanical panels, membrane switches, and AR glasses.

✧ 可用于汽车行业：外观装饰条、汽车零部件、汽车车标、汽车摆件。家居：挂钩、家具、玩具、工艺品。

Can be used in the automotive industry: exterior decorative strips, auto parts, auto logos, auto ornaments. Home: hooks, furniture, toys, handicrafts.

四. 产品特性 Product Features

- 具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

五. 典型性能 Typical performance

项目 Test items	典型值 Typical value	单位 Unit	测试方式 Test method
颜色 color	灰白黑 gray white black	-	目测 Visual inspection
胶系 Type of glue	丙烯酸酯 Acrylate adhesive	-	-
基材 Base material	EVA 泡棉 EVA foam	-	-
总厚度 Total thickness	0.5	mm	ASTM D-3652
剥离强度 (180° Peel strength)	16	N/inch	ASTM D-3330
保持力 Retentivity	>24	h	ASTM D-3654
长期耐温性 Long term temperature resistance	40	°C	GB / T4851 - 2014
短期耐温性 Short term temperature resistance	60	°C	GB / T4851 - 2014

六. 产品规格 Product specifications

- 800mm*33m
- 或其他定制

Other customization

七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，防止包装破损，避免与挥发性溶剂放在一起。存储温度为4~26℃，湿度为40~50%。

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. Suggestion storage temperature is 4~26 °C, and the suggestion humidity is 40~50%.

为保持最佳性能，本品应在生产之日起6个月内使用。

To maintain the best performance, this product should be used within 6months from the date of production.



产品技术说明书

Product technical specification

一. 产品描述 Product Description

P5180泡棉双面胶带是以EVA泡棉为基材，双面涂布高性能丙烯酸压敏胶，复合离型膜/离型纸制作而成。其具有优异的耐候性能、耐化学性、缓冲性、密封性和优越的粘接性。

P5180 double-sided foam tape is made of EVA foam as the base material, double-sided coating of high-performance acrylic pressure-sensitive adhesive, and composite release film/release paper. It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

二. 产品结构 Product structure



三. 主要用途 Main Use

- ✧ 可用于手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜。

Can be used in mobile phones, computers, digital cameras, mechanical panels, membrane switches, and AR glasses.

- ✧ 可用于汽车行业：外观装饰条、汽车零部件、汽车车标、汽车摆件。家居：挂钩、家具、玩具、工艺品。

Can be used in the automotive industry: exterior decorative strips, auto parts, auto logos, auto ornaments. Home: hooks, furniture, toys, handicrafts.

四. 产品特性 Product Features

- 具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

五. 典型性能 Typical performance

项目 Test items	典型值 Typical value	单位 Unit	测试方式 Test method
颜色 color	灰白黑 gray white black	-	目测 Visual inspection
胶系 Type of glue	丙烯酸酯 Acrylate adhesive	-	-
基材 Base material	EVA 泡棉 EVA foam	-	-
总厚度 Total thickness	0.8	mm	ASTM D-3652
剥离强度 (180° Peel strength)	18	N/inch	ASTM D-3330
保持力 Retentivity	>24	h	ASTM D-3654
长期耐温性 Long term temperature resistance	40	°C	GB / T4851 - 2014
短期耐温性 Short term temperature resistance	60	°C	GB / T4851 - 2014

六. 产品规格 Product specifications

- 800mm*33m
- 或其他定制

Other customization

七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，防止包装破损，避免与挥发性溶剂放在一起。存储温度为4~26℃，湿度为40~50%。

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. Suggestion storage temperature is 4~26 °C, and the suggestion humidity is 40~50%.

为保持最佳性能，本品应在生产之日起6个月内使用。

To maintain the best performance, this product should be used within 6months from the date of production.



产品技术说明书


Product technical specification

一. 产品描述 Product Description

P51100泡棉双面胶带是以EVA泡棉为基材，双面涂布高性能丙烯酸压敏胶，复合离型膜/离型纸制作而成。其具有优异的耐候性能、耐化学性、缓冲性、密封性和优越的粘接性。

P51100 double-sided foam tape is made of EVA foam as the base material, double-sided coating of high-performance acrylic pressure-sensitive adhesive, and composite release film/release paper. It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

二. 产品结构 Product structure

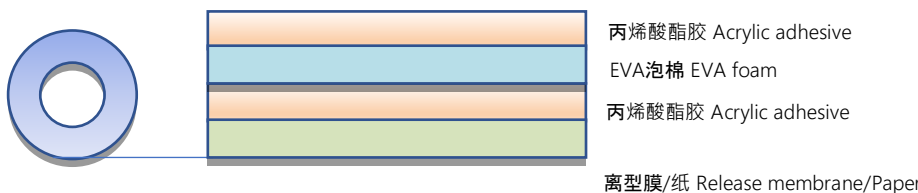

三. 主要用途 Main Use

✧ 可用于手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜。

Can be used in mobile phones, computers, digital cameras, mechanical panels, membrane switches, and AR glasses.

✧ 可用于汽车行业：外观装饰条、汽车零部件、汽车车标、汽车摆件。家居：挂钩、家具、玩具、工艺品。

Can be used in the automotive industry: exterior decorative strips, auto parts, auto logos, auto ornaments. Home: hooks, furniture, toys, handicrafts.

四. 产品特性 Product Features

- 具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

五. 典型性能 Typical performance

项目 Test items	典型值 Typical value	单位 Unit	测试方式 Test method
颜色 color	灰白黑 gray white black	-	目测 Visual inspection
胶系 Type of glue	丙烯酸酯 Acrylate adhesive	-	-
基材 Base material	EVA 泡棉 EVA foam	-	-
总厚度 Total thickness	1.0	mm	ASTM D-3652
剥离强度 (180° Peel strength)	18	N/inch	ASTM D-3330
保持力 Retentivity	>24	h	ASTM D-3654
长期耐温性 Long term temperature resistance	40	°C	GB / T4851 - 2014
短期耐温性 Short term temperature resistance	60	°C	GB / T4851 - 2014

六. 产品规格 Product specifications

- 800mm*33m
- 或其他定制

Other customization

七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，防止包装破损，避免与挥发性溶剂放在一起。存储温度为4~26℃，湿度为40~50%。

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. Suggestion storage temperature is 4~26 °C, and the suggestion humidity is 40~50%.

为保持最佳性能，本品应在生产之日起6个月内使用。

To maintain the best performance, this product should be used within 6months from the date of production.



产品技术说明书

Product technical specification

一. 产品描述 Product Description

P51120泡棉双面胶带是以EVA泡棉为基材，双面涂布高性能丙烯酸压敏胶，复合离型膜/离型纸制作而成。其具有优异的耐候性能、耐化学性、缓冲性、密封性和优越的粘接性。

P51120 double-sided foam tape is made of EVA foam as the base material, double-sided coating of high-performance acrylic pressure-sensitive adhesive, and composite release film/release paper. It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

二. 产品结构 Product structure



三. 主要用途 Main Use

✧ 可用于手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜。

Can be used in mobile phones, computers, digital cameras, mechanical panels, membrane switches, and AR glasses.

✧ 可用于汽车行业：外观装饰条、汽车零部件、汽车车标、汽车摆件。家居：挂钩、家具、玩具、工艺品。

Can be used in the automotive industry: exterior decorative strips, auto parts, auto logos, auto ornaments. Home: hooks, furniture, toys, handicrafts.

四. 产品特性 Product Features

- 具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

五. 典型性能 Typical performance

项目 Test items	典型值 Typical value	单位 Unit	测试方式 Test method
颜色 color	灰白黑 gray white black	-	目测 Visual inspection
胶系 Type of glue	丙烯酸酯 Acrylate adhesive	-	-
基材 Base material	EVA 泡棉 EVA foam	-	-
总厚度 Total thickness	1.2	mm	ASTM D-3652
剥离强度 (180° Peel strength)	16	N/inch	ASTM D-3330
保持力 Retentivity	>24	h	ASTM D-3654
长期耐温性 Long term temperature resistance	40	°C	GB / T4851 - 2014
短期耐温性 Short term temperature resistance	60	°C	GB / T4851 - 2014

六. 产品规格 Product specifications

- 800mm*33m
- 或其他定制

Other customization

七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，防止包装破损，避免与挥发性溶剂放在一起。存储温度为4~26℃，湿度为40~50%。

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. Suggestion storage temperature is 4~26 °C, and the suggestion humidity is 40~50%.

为保持最佳性能，本品应在生产之日起6个月内使用。

To maintain the best performance, this product should be used within 6months from the date of production.



产品技术说明书


Product technical specification

一. 产品描述 Product Description

P51150泡棉双面胶带是以EVA泡棉为基材，双面涂布高性能丙烯酸压敏胶，复合离型膜/离型纸制作而成。其具有优异的耐候性能、耐化学性、缓冲性、密封性和优越的粘接性。

P51150 double-sided foam tape is made of EVA foam as the base material, double-sided coating of high-performance acrylic pressure-sensitive adhesive, and composite release film/release paper. It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

二. 产品结构 Product structure

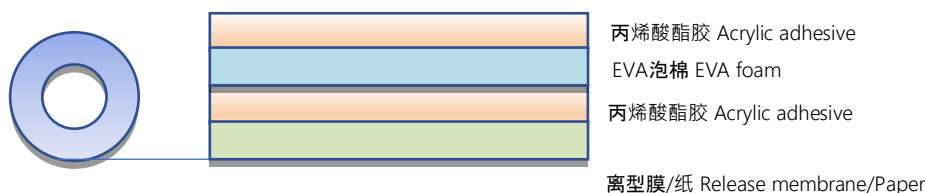

三. 主要用途 Main Use

✧ 可用于手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜。

Can be used in mobile phones, computers, digital cameras, mechanical panels, membrane switches, and AR glasses.

✧ 可用于汽车行业：外观装饰条、汽车零部件、汽车车标、汽车摆件。家居：挂钩、家具、玩具、工艺品。

Can be used in the automotive industry: exterior decorative strips, auto parts, auto logos, auto ornaments. Home: hooks, furniture, toys, handicrafts.

四. 产品特性 Product Features

- 具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

五. 典型性能 Typical performance

项目 Test items	典型值 Typical value	单位 Unit	测试方式 Test method
颜色 color	灰白黑 gray white black	-	目测 Visual inspection
胶系 Type of glue	丙烯酸酯 Acrylate adhesive	-	-
基材 Base material	EVA 泡棉 EVA foam	-	-
总厚度 Total thickness	1.5	mm	ASTM D-3652
剥离强度 (180° Peel strength)	20	N/inch	ASTM D-3330
保持力 Retentivity	>24	h	ASTM D-3654
长期耐温性 Long term temperature resistance	40	°C	GB / T4851 - 2014
短期耐温性 Short term temperature resistance	60	°C	GB / T4851 - 2014

六. 产品规格 Product specifications

- 800mm*33m
- 或其他定制

Other customization

七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，防止包装破损，避免与挥发性溶剂放在一起。存储温度为4~26℃，湿度为40~50%。

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. Suggestion storage temperature is 4~26 °C, and the suggestion humidity is 40~50%.

为保持最佳性能，本品应在生产之日起6个月内使用。

To maintain the best performance, this product should be used within 6months from the date of production.



产品技术说明书


Product technical specification

一. 产品描述 Product Description

P51200泡棉双面胶带是以EVA泡棉为基材，双面涂布高性能丙烯酸压敏胶，复合离型膜/离型纸制作而成。其具有优异的耐候性能、耐化学性、缓冲性、密封性和优越的粘接性。

P51200 double-sided foam tape is made of EVA foam as the base material, double-sided coating of high-performance acrylic pressure-sensitive adhesive, and composite release film/release paper. It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

二. 产品结构 Product structure

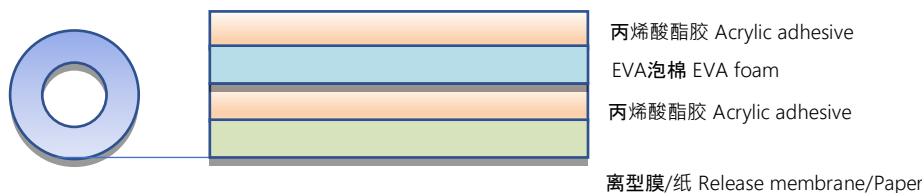

三. 主要用途 Main Use

- ✧ 可用于手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜。

Can be used in mobile phones, computers, digital cameras, mechanical panels, membrane switches, and AR glasses.

- ✧ 可用于汽车行业：外观装饰条、汽车零部件、汽车车标、汽车摆件。家居：挂钩、家具、玩具、工艺品。

Can be used in the automotive industry: exterior decorative strips, auto parts, auto logos, auto ornaments. Home: hooks, furniture, toys, handicrafts.

四. 产品特性 Product Features

- 具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

五. 典型性能 Typical performance

项目 Test items	典型值 Typical value	单位 Unit	测试方式 Test method
颜色 color	灰白黑 gray white black	-	目测 Visual inspection
胶系 Type of glue	丙烯酸酯 Acrylate adhesive	-	-
基材 Base material	EVA 泡棉 EVA foam	-	-
总厚度 Total thickness	2.0	mm	ASTM D-3652
剥离强度 (180° Peel strength)	20	N/inch	ASTM D-3330
保持力 Retentivity	>24	h	ASTM D-3654
长期耐温性 Long term temperature resistance	40	°C	GB / T4851 - 2014
短期耐温性 Short term temperature resistance	60	°C	GB / T4851 - 2014

六. 产品规格 Product specifications

- 800mm*33m
- 或其他定制

Other customization

七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，防止包装破损，避免与挥发性溶剂放在一起。存储温度为4~26℃，湿度为40~50%。

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. Suggestion storage temperature is 4~26 °C, and the suggestion humidity is 40~50%.

为保持最佳性能，本品应在生产之日起6个月内使用。

To maintain the best performance, this product should be used within 6months from the date of production.



产品技术说明书


Product technical specification

一. 产品描述 Product Description

P51300泡棉双面胶带是以EVA泡棉为基材，双面涂布高性能丙烯酸压敏胶，复合离型膜/离型纸制作而成。其具有优异的耐候性能、耐化学性、缓冲性、密封性和优越的粘接性。

P51300 double-sided foam tape is made of EVA foam as the base material, double-sided coating of high-performance acrylic pressure-sensitive adhesive, and composite release film/release paper. It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

二. 产品结构 Product structure

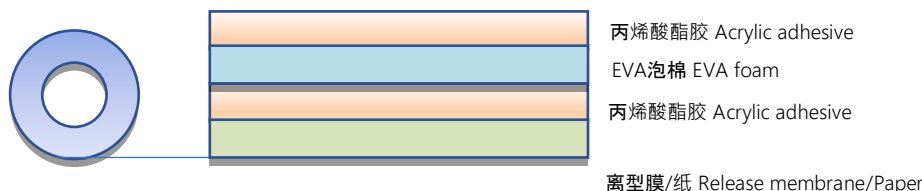

三. 主要用途 Main Use

✧ 可用于手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜。

Can be used in mobile phones, computers, digital cameras, mechanical panels, membrane switches, and AR glasses.

✧ 可用于汽车行业：外观装饰条、汽车零部件、汽车车标、汽车摆件。家居：挂钩、家具、玩具、工艺品。

Can be used in the automotive industry: exterior decorative strips, auto parts, auto logos, auto ornaments. Home: hooks, furniture, toys, handicrafts.

四. 产品特性 Product Features

- 具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

五. 典型性能 Typical performance

项目 Test items	典型值 Typical value	单位 Unit	测试方式 Test method
颜色 color	灰白黑 gray white black	-	目测 Visual inspection
胶系 Type of glue	丙烯酸酯 Acrylate adhesive	-	-
基材 Base material	EVA 泡棉 EVA foam	-	-
总厚度 Total thickness	3.0	mm	ASTM D-3652
剥离强度 (180° Peel strength)	20	N/inch	ASTM D-3330
保持力 Retentivity	>24	h	ASTM D-3654
长期耐温性 Long term temperature resistance	40	°C	GB / T4851 - 2014
短期耐温性 Short term temperature resistance	60	°C	GB / T4851 - 2014

六. 产品规格 Product specifications

- 800mm*33m
- 或其他定制

Other customization

七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，防止包装破损，避免与挥发性溶剂放在一起。存储温度为4~26℃，湿度为40~50%。

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. Suggestion storage temperature is 4~26 °C, and the suggestion humidity is 40~50%.

为保持最佳性能，本品应在生产之日起6个月内使用。

To maintain the best performance, this product should be used within 6months from the date of production.