



## 产品技术说明书


Product technical specification

### 一. 产品描述 Product Description

P3910泡棉双面胶带是以PE泡棉为基材，双面涂布高性能丙烯酸压敏胶，复合离型膜/离型纸制作而成。其具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

P3910 double-sided foam tape is made of PE foam as the base material, double-sided coated with high-performance acrylic pressure-sensitive adhesive, and composite release film/release paper. It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

### 二. 产品结构 Product structure

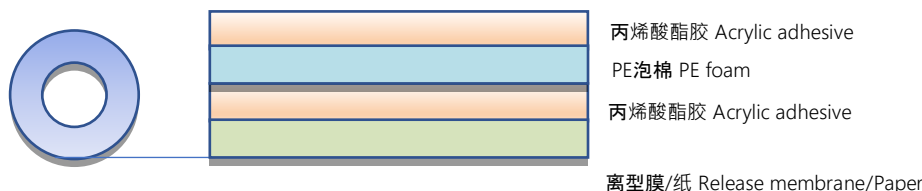

### 三. 主要用途 Main Use

✧ 可用于手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜。

Can be used in mobile phones, computers, digital cameras, mechanical panels, membrane switches, and AR glasses.

✧ 可用于汽车行业：外观装饰条、汽车零部件、汽车车标、汽车摆件。家居：挂钩、家具、玩具、工艺品。

Can be used in the automotive industry: exterior decorative strips, auto parts, auto logos, auto ornaments. Home: hooks, furniture, toys, handicrafts.

### 四. 产品特性 Product Features

- 具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

## 五. 典型性能 Typical performance

项目 Test items	典型值 Typical value	单位 Unit	测试方式 Test method
颜色 color	灰白黑 gray white black	-	目测 Visual inspection
胶系 Type of glue	丙烯酸酯 Acrylate adhesive	-	-
基材 Base material	PE 泡棉 PE foam	-	-
总厚度 Total thickness	0.1	mm	ASTM D-3652
剥离强度 (180° Peel strength)	16	N/inch	ASTM D-3330
保持力 Retentivity	≥24	h	ASTM D-3654
长期耐温性 Long term temperature resistance	40	°C	GB / T4851 - 2014
短期耐温性 Short term temperature resistance	60	°C	GB / T4851 - 2014

## 六. 产品规格 Product specifications

- 800mm\*33m
- 或其他定制

Other customization

## 七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，防止包装破损，避免与挥发性溶剂放在一起。存储温度为4~26℃，湿度为40~50%。

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. Suggestion storage temperature is 4~26 °C, and the suggestion humidity is 40~50%.

为保持最佳性能，本品应在生产之日起6个月内使用。

To maintain the best performance, this product should be used within 6months from the date of production.



## 产品技术说明书


Product technical specification

### 一. 产品描述 Product Description

P3920泡棉双面胶带是以PE泡棉为基材，双面涂布高性能丙烯酸压敏胶，复合离型膜/离型纸制作而成。其具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

P3920 double-sided foam tape is made of PE foam as the base material, double-sided coated with high-performance acrylic pressure-sensitive adhesive, and composite release film/release paper. It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

### 二. 产品结构 Product structure

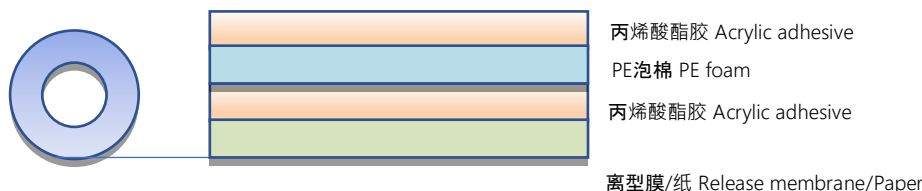

### 三. 主要用途 Main Use

- ✧ 可用于手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜。

Can be used in mobile phones, computers, digital cameras, mechanical panels, membrane switches, and AR glasses.

- ✧ 可用于汽车行业：外观装饰条、汽车零部件、汽车车标、汽车摆件。家居：挂钩、家具、玩具、工艺品。

Can be used in the automotive industry: exterior decorative strips, auto parts, auto logos, auto ornaments. Home: hooks, furniture, toys, handicrafts.

### 四. 产品特性 Product Features

- 具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

## 五. 典型性能 Typical performance

项目 Test items	典型值 Typical value	单位 Unit	测试方式 Test method
颜色 color	灰白黑 gray white black	-	目测 Visual inspection
胶系 Type of glue	丙烯酸酯 Acrylate adhesive	-	-
基材 Base material	PE 泡棉 PE foam	-	-
总厚度 Total thickness	0.2	mm	ASTM D-3652
剥离强度 (180° Peel strength)	16	N/inch	ASTM D-3330
保持力 Retentivity	≥24	h	ASTM D-3654
长期耐温性 Long term temperature resistance	40	°C	GB / T4851 - 2014
短期耐温性 Short term temperature resistance	60	°C	GB / T4851 - 2014

## 六. 产品规格 Product specifications

- 800mm\*33m
- 或其他定制

Other customization

## 七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，防止包装破损，避免与挥发性溶剂放在一起。存储温度为4~26℃，湿度为40~50%。

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. Suggestion storage temperature is 4~26 °C, and the suggestion humidity is 40~50%.

为保持最佳性能，本品应在生产之日起6个月内使用。

To maintain the best performance, this product should be used within 6months from the date of production.



## 产品技术说明书


Product technical specification

### 一. 产品描述 Product Description

P3930泡棉双面胶带是以PE泡棉为基材，双面涂布高性能丙烯酸压敏胶，复合离型膜/离型纸制作而成。其具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

P3930 double-sided foam tape is made of PE foam as the base material, double-sided coated with high-performance acrylic pressure-sensitive adhesive, and composite release film/release paper. It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

### 二. 产品结构 Product structure

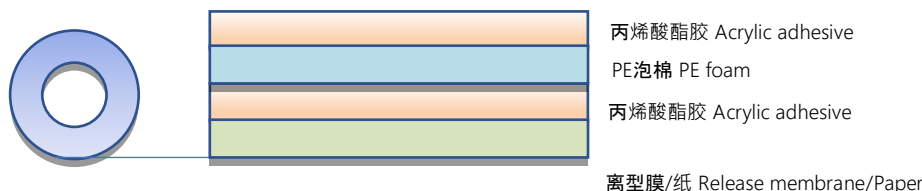

### 三. 主要用途 Main Use

- ✧ 可用于手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜。

Can be used in mobile phones, computers, digital cameras, mechanical panels, membrane switches, and AR glasses.

- ✧ 可用于汽车行业：外观装饰条、汽车零部件、汽车车标、汽车摆件。家居：挂钩、家具、玩具、工艺品。

Can be used in the automotive industry: exterior decorative strips, auto parts, auto logos, auto ornaments. Home: hooks, furniture, toys, handicrafts.

### 四. 产品特性 Product Features

- 具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

## 五. 典型性能 Typical performance

项目 Test items	典型值 Typical value	单位 Unit	测试方式 Test method
颜色 color	灰白黑 gray white black	-	目测 Visual inspection
胶系 Type of glue	丙烯酸酯 Acrylate adhesive	-	-
基材 Base material	PE 泡棉 PE foam	-	-
总厚度 Total thickness	0.3	mm	ASTM D-3652
剥离强度 (180° Peel strength)	16	N/inch	ASTM D-3330
保持力 Retentivity	≥24	h	ASTM D-3654
长期耐温性 Long term temperature resistance	40	°C	GB / T4851 - 2014
短期耐温性 Short term temperature resistance	60	°C	GB / T4851 - 2014

## 六. 产品规格 Product specifications

- 800mm\*33m
- 或其他定制

Other customization

## 七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，防止包装破损，避免与挥发性溶剂放在一起。存储温度为4~26℃，湿度为40~50%。

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. Suggestion storage temperature is 4~26 °C, and the suggestion humidity is 40~50%.

为保持最佳性能，本品应在生产之日起6个月内使用。

To maintain the best performance, this product should be used within 6months from the date of production.



## 产品技术说明书

Product technical specification

### 一. 产品描述 Product Description

P3940PE泡棉双面胶带是以PE泡棉为基材，双面涂布高性能丙烯酸压敏胶，再复以为双硅离型纸制作而成。其具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

P3940PE foam double-sided tape is made of PE foam as the base material, double-sided coated with high-performance acrylic pressure-sensitive adhesive, and then laminated with double silicone release paper. It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

### 二. 产品结构 Product structure



### 三. 主要用途 Main Use

✧ 电子市场：手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜。

Electronic market: mobile phones, computers, digital cameras, mechanical panels, film switches, AR glasses.

✧ 汽车市场：外观装饰条、汽车零部件、汽车车标、汽车摆件。

Automotive market: exterior trim, auto parts, car badges, car ornaments.

✧ 家居市场：挂钩、家具、玩具、工艺品。

Home market: hooks, furniture, toys, crafts.

### 四. 产品特性 Product Features

➤ 其具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

It has excellent weather resistance, chemical resistance, buffering, sealing, and superior adhesion.

## 五. 典型性能 Typical performance

项目 Test items	典型值 Typical value	单位 Unit	测试方式 Test method
颜色 color	黑色 black	-	目测 Visual inspection
胶系 Type of glue	丙烯酸酯 Acrylate adhesive		
基材 Base material	PE 泡棉 PE foam	-	-
离型材料 Release material	白纸离型纸 White release paper	-	-
厚度 thickness	0.4±0.04	mm	ASTM D-3652
抗拉强度 Tensile strength	≥30	Mpa	ASTM D-3759
伸长率 Elongation	≥360	%	ASTM D-3759
剥离强度 Peel strength (180°)	≥20	%	ASTM D-3330
持粘性 Cohesion	≥48	H	GB/4852
长期耐温性 Long-term temperature resistance	-20~80	°C	-
短期耐温性 Short-term temperature resistance	-20~130	°C	-

## 六. 产品规格 Product specifications

- 1040mm\*50m
- 或其他定制

Other customization

## 七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，置于阴凉黑暗处，避免阳光直射，远离化学品。储存温度5—30℃，避免阳光直射。，湿度为40-70%。

It is recommended to store it in a clean and dry place, in a cool and dark place, avoid direct sunlight, and keep away from chemicals. Storage temperature: 5-30 °C, avoid direct sunlight, humidity: 40-70%.

为保持最佳性能，本品应在生产之日起18个月内使用。

To maintain the best performance, this product should be used within 12months from the date of production.



## 产品技术说明书


Product technical specification

### 一. 产品描述 Product Description

P3950泡棉双面胶带是以PE泡棉为基材，双面涂布高性能丙烯酸压敏胶，复合离型膜/离型纸制作而成。其具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

P3950 double-sided foam tape is made of PE foam as the base material, double-sided coated with high-performance acrylic pressure-sensitive adhesive, and composite release film/release paper. It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

### 二. 产品结构 Product structure

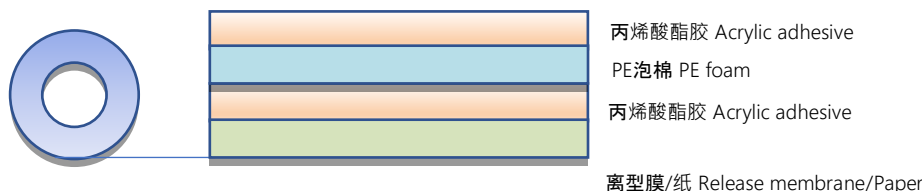

### 三. 主要用途 Main Use

- ✧ 可用于手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜。

Can be used in mobile phones, computers, digital cameras, mechanical panels, membrane switches, and AR glasses.

- ✧ 可用于汽车行业：外观装饰条、汽车零部件、汽车车标、汽车摆件。家居：挂钩、家具、玩具、工艺品。

Can be used in the automotive industry: exterior decorative strips, auto parts, auto logos, auto ornaments. Home: hooks, furniture, toys, handicrafts.

### 四. 产品特性 Product Features

- 具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

## 五. 典型性能 Typical performance

项目 Test items	典型值 Typical value	单位 Unit	测试方式 Test method
颜色 color	灰白黑 gray white black	-	目测 Visual inspection
胶系 Type of glue	丙烯酸酯 Acrylic adhesive	-	-
基材 Base material	PE 泡棉 PE foam	-	-
总厚度 Total thickness	0.5	mm	ASTM D-3652
剥离强度 (180° Peel strength)	16	N/inch	ASTM D-3330
保持力 Retentivity	≥24	h	ASTM D-3654
长期耐温性 Long term temperature resistance	40	°C	GB / T4851 - 2014
短期耐温性 Short term temperature resistance	60	°C	GB / T4851 - 2014

## 六. 产品规格 Product specifications

- 800mm\*33m
- 或其他定制

Other customization

## 七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，防止包装破损，避免与挥发性溶剂放在一起。存储温度为4~26℃，湿度为40~50%。

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. Suggestion storage temperature is 4~26 °C, and the suggestion humidity is 40~50%.

为保持最佳性能，本品应在生产之日起6个月内使用。

To maintain the best performance, this product should be used within 6months from the date of production.



## 产品技术说明书


Product technical specification

### 一. 产品描述 Product Description

P3980泡棉双面胶带是以PE泡棉为基材，双面涂布高性能丙烯酸压敏胶，复合离型膜/离型纸制作而成。其具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

P3980 double-sided foam tape is made of PE foam as the base material, double-sided coated with high-performance acrylic pressure-sensitive adhesive, and composite release film/release paper. It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

### 二. 产品结构 Product structure

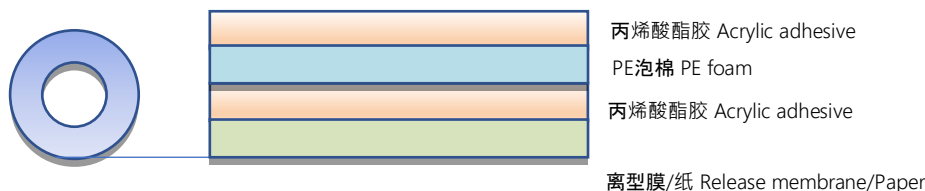

### 三. 主要用途 Main Use

- ✧ 可用于手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜。

Can be used in mobile phones, computers, digital cameras, mechanical panels, membrane switches, and AR glasses.

- ✧ 可用于汽车行业：外观装饰条、汽车零部件、汽车车标、汽车摆件。家居：挂钩、家具、玩具、工艺品。

Can be used in the automotive industry: exterior decorative strips, auto parts, auto logos, auto ornaments. Home: hooks, furniture, toys, handicrafts.

### 四. 产品特性 Product Features

- 具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

## 五. 典型性能 Typical performance

项目 Test items	典型值 Typical value	单位 Unit	测试方式 Test method
颜色 color	灰白黑 gray white black	-	目测 Visual inspection
胶系 Type of glue	丙烯酸酯 Acrylate adhesive	-	-
基材 Base material	PE 泡棉 PE foam	-	-
总厚度 Total thickness	0.8	mm	ASTM D-3652
剥离强度 (180° Peel strength)	18	N/inch	ASTM D-3330
保持力 Retentivity	≥24	h	ASTM D-3654
长期耐温性 Long term temperature resistance	40	°C	GB / T4851 - 2014
短期耐温性 Short term temperature resistance	60	°C	GB / T4851 - 2014

## 六. 产品规格 Product specifications

- 800mm\*33m
- 或其他定制

Other customization

## 七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，防止包装破损，避免与挥发性溶剂放在一起。存储温度为4~26℃，湿度为40~50%。

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. Suggestion storage temperature is 4~26 °C, and the suggestion humidity is 40~50%.

为保持最佳性能，本品应在生产之日起6个月内使用。

To maintain the best performance, this product should be used within 6months from the date of production.



## 产品技术说明书


Product technical specification

### 一. 产品描述 Product Description

P3980BB-10A蓝膜黑色PE泡棉双面胶带是以PE泡棉为基材，双面涂布高性能丙烯酸压敏胶，复合离型膜/离型纸制作而成。其具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

P3980BB-10A blue film black PE foam double-sided tape is made of PE foam as the base material, coated with high-performance acrylic pressure-sensitive adhesive on both sides, and composite release film/release paper. It has excellent weathering, chemical resistance, cushioning, sealing and superior adhesion.

### 二. 产品结构 Product structure

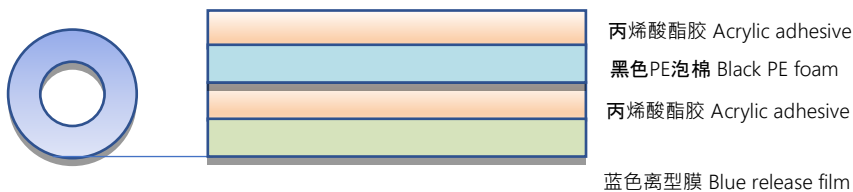

### 三. 主要用途 Main Use

- ✧ 可用于手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜。

Can be used in mobile phones, computers, digital cameras, mechanical panels, membrane switches, and AR glasses.

- ✧ 可用于汽车行业：外观装饰条、汽车零部件、汽车车标、汽车摆件。家居：挂钩、家具、玩具、工艺品。

Can be used in the automotive industry: exterior decorative strips, auto parts, auto logos, auto ornaments. Home: hooks, furniture, toys, handicrafts.

#### 四. 产品特性 Product Features

- 具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

#### 五. 典型性能 Typical performance

项目 Test items	典型值 Typical value	单位 Unit	测试方式 Test method
颜色 color	蓝色 blue	-	目测 Visual inspection
胶系 Type of glue	丙烯酸酯 Acrylate adhesive	-	-
基材 Base material	黑色 PE 泡棉 Black PE foam	-	-
总厚度 Total thickness	0.8	mm	ASTM D-3652
剥离强度 (180° Peel strength)	28-33	N/inch	ASTM D-3330
保持力 Retentivity	≥24	h	ASTM D-3654
长期耐温性 Long term temperature resistance	40	°C	GB / T4851 - 2014
短期耐温性 Short term temperature resistance	60	°C	GB / T4851 - 2014

#### 六. 产品规格 Product specifications

- 800mm\*33m
- 或其他定制

Other customization

#### 七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，防止包装破损，避免与挥发性溶剂放在一起。存储温度为4~26℃，湿度为40~50%。

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. Suggestion storage temperature is 4~26 °C, and the suggestion humidity is 40~50%.

为保持最佳性能，本品应在生产之日起6个月内使用。

To maintain the best performance, this product should be used within 6months from the date of production.



## 产品技术说明书


Product technical specification

### 一. 产品描述 Product Description

P39100泡棉双面胶带是以PE泡棉为基材，双面涂布高性能丙烯酸压敏胶，复合离型膜/离型纸制作而成。其具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

P39100 double-sided foam tape is made of PE foam as the base material, double-sided coated with high-performance acrylic pressure-sensitive adhesive, and composite release film/release paper. It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

### 二. 产品结构 Product structure

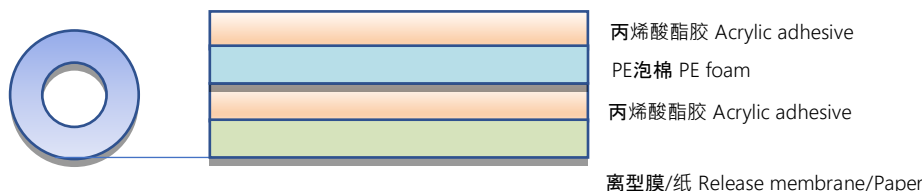

### 三. 主要用途 Main Use

- ✧ 可用于手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜。

Can be used in mobile phones, computers, digital cameras, mechanical panels, membrane switches, and AR glasses.

- ✧ 可用于汽车行业：外观装饰条、汽车零部件、汽车车标、汽车摆件。家居：挂钩、家具、玩具、工艺品。

Can be used in the automotive industry: exterior decorative strips, auto parts, auto logos, auto ornaments. Home: hooks, furniture, toys, handicrafts.

### 四. 产品特性 Product Features

- 具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

## 五. 典型性能 Typical performance

项目 Test items	典型值 Typical value	单位 Unit	测试方式 Test method
颜色 color	灰白黑 gray white black	-	目测 Visual inspection
胶系 Type of glue	丙烯酸酯 Acrylate adhesive	-	-
基材 Base material	PE 泡棉 PE foam	-	-
总厚度 Total thickness	1.00	mm	ASTM D-3652
剥离强度 (180° Peel strength)	18	N/inch	ASTM D-3330
保持力 Retentivity	≥24	h	ASTM D-3654
长期耐温性 Long term temperature resistance	40	°C	GB / T4851 - 2014
短期耐温性 Short term temperature resistance	60	°C	GB / T4851 - 2014

## 六. 产品规格 Product specifications

- 800mm\*33m
- 或其他定制

Other customization

## 七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，防止包装破损，避免与挥发性溶剂放在一起。存储温度为4~26℃，湿度为40~50%。

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. Suggestion storage temperature is 4~26 °C, and the suggestion humidity is 40~50%.

为保持最佳性能，本品应在生产之日起6个月内使用。

To maintain the best performance, this product should be used within 6months from the date of production.



## 产品技术说明书

Product technical specification

### 一. 产品描述 Product Description

P39100BRA双面胶带是以10倍发泡PE泡棉为基材，双面均匀涂布高性能丙烯酸酯压敏胶，再复合红膜制作而成的工业用途胶粘带。

P39100BRA foam double-sided tape is an industrial adhesive tape made of 10 times foamed PE foam as the base material, evenly coated on both sides with high-performance acrylate pressure sensitive adhesive, and then compounded with red film.

### 二. 产品结构 Product structure



### 三. 主要用途 Main Use

✧ 电子行业：手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜

Electronics industry: mobile phones, computers, digital cameras, mechanical panels, film switches, AR glasses

✧ 汽车行业：外观装饰条、汽车零部件、汽车车标、汽车摆件

Automotive industry: exterior decorative strips, automotive parts, automotive logos, automotive accessories

✧ 家具行业：挂钩、家具、玩具、工艺品

Furniture industry: hooks, furniture, toys, handicrafts

### 四. 产品特性 Product Features

➤ 持粘力强

Strong adhesion force

➤ 粘接力高

High adhesive strength

➤ 缓冲性佳

Good buffering performance

➤ 密封性佳

Good sealing performance

## 五. 典型性能 Typical performance

项 目 Test items	测试方式 Test method	单位 Unit	P39100BRA
颜色 Color	目测 Visual inspection	-	黑色 Black
胶系 Type of glue	-	-	丙烯酸酯 Acrylate adhesive
离型材料 Release material	-	-	红色离型膜 Red release film
基材 Base material	-	-	PE 泡棉 (10 倍发泡) PE foam (10x foam)
总厚度 Total thickness	ASTM D-3652	mm	1
180° 剥离强度 (钢板, 20min) 180° Peel strength (SUS, 20min)	GB/T2792-2014	N/inch	≥15
常温保持力 Room temperature retention	GB/T4851-1998	h	≥48
初粘力 (14#球) Initial adhesion force (14 # ball)	GB/T4852-2002	#	≥3
长期耐温性 Long term temperature resistance	GB/T 4851-2014	°C	40
短期耐温性 Short term temperature resistance	GB/T 4851-2014	°C	60

## 六. 产品规格 Product specifications

➤ 1040mm\*50m

➤ 1040mm\*300m

## ➤ 或其他定制

Other customization

## 七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，防止包装破损，避免与挥发性溶剂放在一起。存储温度为4 ~ 26°C，湿度为40 ~ 50%。

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. The storage temperature is 4~26 °C, and the humidity is 40~50%.

为保持最佳性能，本品应在生产之日起12个月内使用。

To maintain the best performance, this product should be used within 12months from the date of production.

## 八. 声明 Statement

上述测试结果仅为典型值，并非保证值。如果有新的认识和新的经验出现，优三会相应修改此资料，且不再另行通知。优三强烈推荐客户在使用产品前进行独立的测试，以了解产品的适用性。

The above test results are only typical values, not guaranteed values. In case of new knowledge and experience, Yousan will modify this information accordingly without further notice. Yousan strongly recommends that customers conduct independent tests before using the product to understand the applicability of the product.



## 产品技术说明书


Product technical specification

### 一. 产品描述 Product Description

P39100BRB双面胶带是以15倍发泡PE泡棉为基材，双面均匀涂布丙烯酸酯压敏胶，再复合红膜制作而成的工业用途胶粘带。

P39100BRB double-sided tape is an industrial adhesive tape made of 15 times foamed PE foam as the base material, evenly coated with acrylate pressure sensitive adhesive on both sides, and then compounded with red film.

### 二. 产品结构 Product structure

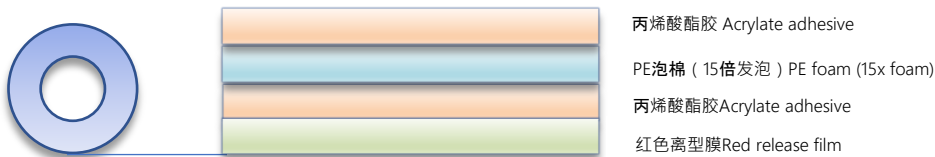

丙烯酸酯胶 Acrylate adhesive

PE泡棉 (15倍发泡) PE foam (15x foam)

丙烯酸酯胶 Acrylate adhesive

红色离型膜 Red release film

### 三. 主要用途 Main Use

✧ 电子行业：手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜

Electronics industry: mobile phones, computers, digital cameras, mechanical panels, film switches, AR glasses

✧ 汽车行业：外观装饰条、汽车零部件、汽车车标、汽车摆件

Automotive industry: exterior decorative strips, automotive parts, automotive logos, automotive accessories

✧ 家具行业：挂钩、家具、玩具、工艺品

Furniture industry: hooks, furniture, toys, handicrafts

### 四. 产品特性 Product Features

➤ 初粘力强

High initial adhesion

➤ 粘接力高

High adhesive strength

➤ 缓冲性佳

Good buffering performance

➤ 密封性佳

Good sealing performance

## 五. 典型性能 Typical performance

项 目 Test items	测试方式 Test method	单位 Unit	P39100BRB
颜色 Color	目测 Visual inspection	-	黑色 Black
胶系 Type of glue	-	-	丙烯酸酯 Acrylate adhesive
离型材料 Release material	-	-	红色离型膜 Red release film
基材 Base material	-	-	PE 泡棉 (15 倍发泡) PE foam (15x foam)
总厚度 Total thickness	ASTM D-3652	mm	1
180° 剥离强度 (钢板, 20min) 180° Peel strength (SUS, 20min)	GB/T2792-2014	N/inch	≥11 (剥不开)
常温保持力 Room temperature retention	GB/T4851-1998	h	≥24
初粘力 (14#球) Initial adhesion force (14 # ball)	GB/T4852-2002	#	≥10
长期耐温性 Long term temperature resistance	GB/T 4851-2014	°C	40
短期耐温性 Short term temperature resistance	GB/T 4851-2014	°C	60

## 六. 产品规格 Product specifications

➤ 1040mm\*50m

➤ 1040mm\*300m

➤ 或其他定制

Other customization

## 七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，**防止包装破损，避免与挥发性溶剂放在一起。存储温度为4 ~ 26°C，湿度为40 ~ 50%。**

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. The storage temperature is 4~26 °C, and the humidity is 40~50%.

为保持最佳性能，**本品应在生产之日起12个月内使用。**

To maintain the best performance, this product should be used within 12months from the date of production.

## 八. 声明 Statement

**上述测试结果仅为典型值，并非保证值。如果有新的认识和新的经验出现，优三会相应修改此资料，且不再另行通知。优三强烈推荐客户在使用产品前进行独立的测试，以了解产品的适用性。**

The above test results are only typical values, not guaranteed values. In case of new knowledge and experience, Yousan will modify this information accordingly without further notice. Yousan strongly recommends that customers conduct independent tests before using the product to understand the applicability of the product.



## 产品技术说明书

Product technical specification

### 一. 产品描述 Product Description

P39100BRBA双面胶带是以15倍发泡PE泡棉为基材，双面均匀涂布高性能丙烯酸酯压敏胶，再复合红膜制作而成的工业用途胶粘带。

P39100BRBA double-sided tape is an industrial adhesive tape made of 15 times foamed PE foam as the base material, evenly coated on both sides with high-performance acrylate pressure sensitive adhesive, and then compounded with red film.

### 二. 产品结构 Product structure



### 三. 主要用途 Main Use

✧ 电子行业：手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜

Electronics industry: mobile phones, computers, digital cameras, mechanical panels, film switches, AR glasses

✧ 汽车行业：外观装饰条、汽车零部件、汽车车标、汽车摆件

Automotive industry: exterior decorative strips, automotive parts, automotive logos, automotive accessories

✧ 家具行业：挂钩、家具、玩具、工艺品

Furniture industry: hooks, furniture, toys, handicrafts

### 四. 产品特性 Product Features

➤ 持粘力强

Strong adhesion force

➤ 粘接力高

High adhesive strength

➤ 缓冲性佳

Good buffering performance

➤ 密封性佳

Good sealing performance

## 五. 典型性能 Typical performance

项 目 Test items	测试方式 Test method	单位 Unit	P39100BRBA
颜色 Color	目测 Visual inspection	-	黑色 Black
胶系 Type of glue	-	-	丙烯酸酯 Acrylate adhesive
离型材料 Release material	-	-	红色离型膜 Red release film
基材 Base material	-	-	PE 泡棉 (15 倍发泡) PE foam (15x foam)
总厚度 Total thickness	ASTM D-3652	mm	1
180° 剥离强度 (钢板, 20min) 180° Peel strength (SUS, 20min)	GB/T2792-2014	N/inch	≥9 (剥不开)
常温保持力 Room temperature retention	GB/T4851-1998	h	≥48
初粘力 (14#球) Initial adhesion force (14 # ball)	GB/T4852-2002	#	≥3
长期耐温性 Long term temperature resistance	GB/T 4851-2014	°C	40
短期耐温性 Short term temperature resistance	GB/T 4851-2014	°C	60

## 六. 产品规格 Product specifications

➤ 1040mm\*50m

➤ 1040mm\*300m

➤ 或其他定制

Other customization

## 七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，防止包装破损，避免与挥发性溶剂放在一起。存储温度为4 ~ 26°C，湿度为40 ~ 50%。

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. The storage temperature is 4~26 °C, and the humidity is 40~50%.

为保持最佳性能，本品应在生产之日起12个月内使用。

To maintain the best performance, this product should be used within 12months from the date of production.

## 八. 声明 Statement

上述测试结果仅为典型值，并非保证值。如果有新的认识和新的经验出现，优三会相应修改此资料，且不再另行通知。优三强烈推荐客户在使用产品前进行独立的测试，以了解产品的适用性。

The above test results are only typical values, not guaranteed values. In case of new knowledge and experience, Yousan will modify this information accordingly without further notice. Yousan strongly recommends that customers conduct independent tests before using the product to understand the applicability of the product.



## 产品技术说明书

Product technical specification

### 一. 产品描述 Product Description

P39100BRC**双面胶带**是以**20倍发泡PE泡棉**为基材，**双面均匀涂布丙烯酸酯压敏胶**，**再复合红膜**制作而成的工业用途胶粘带。

P39100BRC double-sided tape is an industrial adhesive tape made of 20 times foamed PE foam as the base material, evenly coated with acrylate pressure sensitive adhesive on both sides, and then compounded with red film.

### 二. 产品结构 Product structure



丙烯酸酯胶 Acrylate adhesive

PE泡棉 (20倍发泡) PE foam (20x foam)

丙烯酸酯胶 Acrylate adhesive

红色离型膜 Red release film

### 三. 主要用途 Main Use

✧ 电子行业：**手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜**

Electronics industry: mobile phones, computers, digital cameras, mechanical panels, film switches, AR glasses

✧ 汽车行业：**外观装饰条、汽车零部件、汽车车标、汽车摆件**

Automotive industry: exterior decorative strips, automotive parts, automotive logos, automotive accessories

✧ 家具行业：**挂钩、家具、玩具、工艺品**

Furniture industry: hooks, furniture, toys, handicrafts

### 四. 产品特性 Product Features

➤ **初粘力强**

High initial adhesion

➤ **粘接力高**

High adhesive strength

➤ 缓冲性佳

Good buffering performance

➤ 密封性佳

Good sealing performance

## 五. 典型性能 Typical performance

项 目 Test items	测试方式 Test method	单位 Unit	P39100BRC
颜色 Color	目测 Visual inspection	-	黑色 Black
胶系 Type of glue	-	-	丙烯酸酯 Acrylate adhesive
离型材料 Release material	-	-	红色离型膜 Red release film
基材 Base material	-	-	PE 泡棉 (20 倍发泡) PE foam (20x foam)
总厚度 Total thickness	ASTM D-3652	mm	1
180° 剥离强度 (钢板, 20min) 180° Peel strength (SUS, 20min)	GB/T2792-2014	N/inch	≥7 (剥不开)
常温保持力 Room temperature retention	GB/T4851-1998	h	≥24
初粘力 (14#球) Initial adhesion force (14 # ball)	GB/T4852-2002	#	≥10
长期耐温性 Long term temperature resistance	GB/T 4851-2014	°C	40
短期耐温性 Short term temperature resistance	GB/T 4851-2014	°C	60

## 六. 产品规格 Product specifications

➤ 1040mm\*50m

➤ 1040mm\*300m

➤ 或其他定制

Other customization

## 七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，**防止包装破损，避免与挥发性溶剂放在一起。存储温度为4 ~ 26°C，湿度为40 ~ 50%。**

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. The storage temperature is 4~26 °C, and the humidity is 40~50%.

为保持最佳性能，**本品应在生产之日起12个月内使用。**

To maintain the best performance, this product should be used within 12months from the date of production.

## 八. 声明 Statement

**上述测试结果仅为典型值，并非保证值。如果有新的认识和新的经验出现，优三会相应修改此资料，且不再另行通知。优三强烈推荐客户在使用产品前进行独立的测试，以了解产品的适用性。**

The above test results are only typical values, not guaranteed values. In case of new knowledge and experience, Yousan will modify this information accordingly without further notice. Yousan strongly recommends that customers conduct independent tests before using the product to understand the applicability of the product.



## 产品技术说明书


Product technical specification

### 一. 产品描述 Product Description

P39120泡棉双面胶带是以PE泡棉为基材，双面涂布高性能丙烯酸压敏胶，复合离型膜/离型纸制作而成。其具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

P39120 double-sided foam tape is made of PE foam as the base material, double-sided coated with high-performance acrylic pressure-sensitive adhesive, and composite release film/release paper. It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

### 二. 产品结构 Product structure

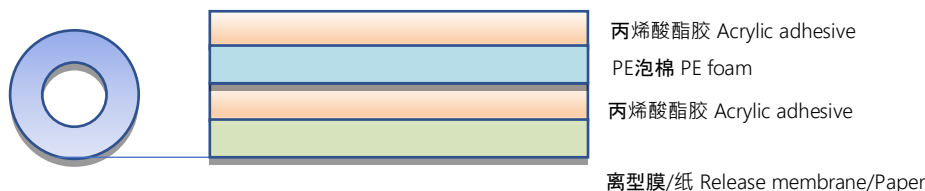

### 三. 主要用途 Main Use

✧ 可用于手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜。

Can be used in mobile phones, computers, digital cameras, mechanical panels, membrane switches, and AR glasses.

✧ 可用于汽车行业：外观装饰条、汽车零部件、汽车车标、汽车摆件。家居：挂钩、家具、玩具、工艺品。

Can be used in the automotive industry: exterior decorative strips, auto parts, auto logos, auto ornaments. Home: hooks, furniture, toys, handicrafts.

### 四. 产品特性 Product Features

- 具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

## 五. 典型性能 Typical performance

项目 Test items	典型值 Typical value	单位 Unit	测试方式 Test method
颜色 color	灰白黑 gray white black	-	目测 Visual inspection
胶系 Type of glue	丙烯酸酯 Acrylate adhesive	-	-
基材 Base material	PE 泡棉 PE foam	-	-
总厚度 Total thickness	1.20	mm	ASTM D-3652
剥离强度 (180° Peel strength)	18	N/inch	ASTM D-3330
保持力 Retentivity	≥24	h	ASTM D-3654
长期耐温性 Long term temperature resistance	40	°C	GB / T4851 - 2014
短期耐温性 Short term temperature resistance	60	°C	GB / T4851 - 2014

## 六. 产品规格 Product specifications

- 800mm\*33m
- 或其他定制

Other customization

## 七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，防止包装破损，避免与挥发性溶剂放在一起。存储温度为4~26℃，湿度为40~50%。

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. Suggestion storage temperature is 4~26 °C, and the suggestion humidity is 40~50%.

为保持最佳性能，本品应在生产之日起6个月内使用。

To maintain the best performance, this product should be used within 6months from the date of production.



## 产品技术说明书


Product technical specification

### 一. 产品描述 Product Description

P39150泡棉双面胶带是以PE泡棉为基材，双面涂布高性能丙烯酸压敏胶，复合离型膜/离型纸制作而成。其具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

P39150 double-sided foam tape is made of PE foam as the base material, double-sided coated with high-performance acrylic pressure-sensitive adhesive, and composite release film/release paper. It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

### 二. 产品结构 Product structure

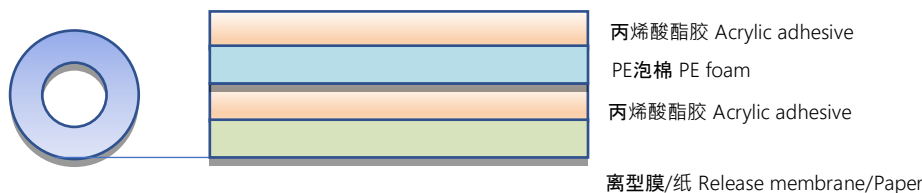

### 三. 主要用途 Main Use

✧ 可用于手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜。

Can be used in mobile phones, computers, digital cameras, mechanical panels, membrane switches, and AR glasses.

✧ 可用于汽车行业：外观装饰条、汽车零部件、汽车车标、汽车摆件。家居：挂钩、家具、玩具、工艺品。

Can be used in the automotive industry: exterior decorative strips, auto parts, auto logos, auto ornaments. Home: hooks, furniture, toys, handicrafts.

### 四. 产品特性 Product Features

- 具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

## 五. 典型性能 Typical performance

项目 Test items	典型值 Typical value	单位 Unit	测试方式 Test method
颜色 color	灰白黑 gray white black	-	目测 Visual inspection
胶系 Type of glue	丙烯酸酯 Acrylate adhesive	-	-
基材 Base material	PE 泡棉 PE foam	-	-
总厚度 Total thickness	1.50	mm	ASTM D-3652
剥离强度 (180° Peel strength)	20	N/inch	ASTM D-3330
保持力 Retentivity	≥24	h	ASTM D-3654
长期耐温性 Long term temperature resistance	40	°C	GB / T4851 - 2014
短期耐温性 Short term temperature resistance	60	°C	GB / T4851 - 2014

## 六. 产品规格 Product specifications

- 800mm\*33m
- 或其他定制

Other customization

## 七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，防止包装破损，避免与挥发性溶剂放在一起。存储温度为4~26℃，湿度为40~50%。

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. Suggestion storage temperature is 4~26 °C, and the suggestion humidity is 40~50%.

为保持最佳性能，本品应在生产之日起6个月内使用。

To maintain the best performance, this product should be used within 6months from the date of production.



## 产品技术说明书


Product technical specification

### 一. 产品描述 Product Description

P39200泡棉双面胶带是以PE泡棉为基材，双面涂布高性能丙烯酸压敏胶，复合离型膜/离型纸制作而成。其具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

P39200 double-sided foam tape is made of PE foam as the base material, double-sided coated with high-performance acrylic pressure-sensitive adhesive, and composite release film/release paper. It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

### 二. 产品结构 Product structure

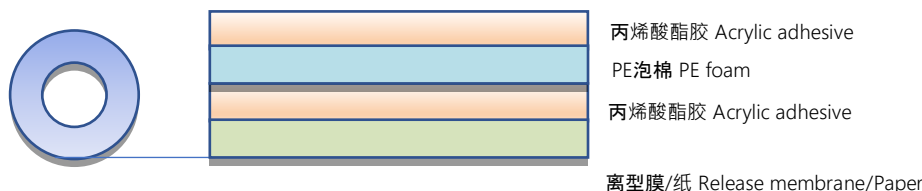

### 三. 主要用途 Main Use

- ✧ 可用于手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜。

Can be used in mobile phones, computers, digital cameras, mechanical panels, membrane switches, and AR glasses.

- ✧ 可用于汽车行业：外观装饰条、汽车零部件、汽车车标、汽车摆件。家居：挂钩、家具、玩具、工艺品。

Can be used in the automotive industry: exterior decorative strips, auto parts, auto logos, auto ornaments. Home: hooks, furniture, toys, handicrafts.

### 四. 产品特性 Product Features

- 具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

## 五. 典型性能 Typical performance

项目 Test items	典型值 Typical value	单位 Unit	测试方式 Test method
颜色 color	灰白黑 gray white black	-	目测 Visual inspection
胶系 Type of glue	丙烯酸酯 Acrylate adhesive	-	-
基材 Base material	PE 泡棉 PE foam	-	-
总厚度 Total thickness	2.00	mm	ASTM D-3652
剥离强度 (180° Peel strength)	20	N/inch	ASTM D-3330
保持力 Retentivity	≥24	h	ASTM D-3654
长期耐温性 Long term temperature resistance	40	°C	GB / T4851 - 2014
短期耐温性 Short term temperature resistance	60	°C	GB / T4851 - 2014

## 六. 产品规格 Product specifications

- 800mm\*33m
- 或其他定制

Other customization

## 七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，防止包装破损，避免与挥发性溶剂放在一起。存储温度为4~26℃，湿度为40~50%。

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. Suggestion storage temperature is 4~26 °C, and the suggestion humidity is 40~50%.

为保持最佳性能，本品应在生产之日起6个月内使用。

To maintain the best performance, this product should be used within 6months from the date of production.



## 产品技术说明书


Product technical specification

### 一. 产品描述 Product Description

P39300泡棉双面胶带是以PE泡棉为基材，双面涂布高性能丙烯酸压敏胶，复合离型膜/离型纸制作而成。其具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

P39300 double-sided foam tape is made of PE foam as the base material, double-sided coated with high-performance acrylic pressure-sensitive adhesive, and composite release film/release paper. It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

### 二. 产品结构 Product structure

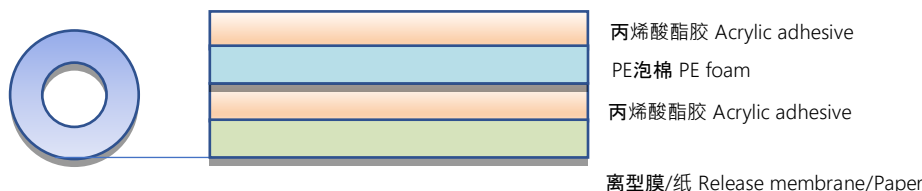

### 三. 主要用途 Main Use

- ✧ 可用于手机、电脑、数码相机、机械面板、薄膜开关、AR眼镜。

Can be used in mobile phones, computers, digital cameras, mechanical panels, membrane switches, and AR glasses.

- ✧ 可用于汽车行业：外观装饰条、汽车零部件、汽车车标、汽车摆件。家居：挂钩、家具、玩具、工艺品。

Can be used in the automotive industry: exterior decorative strips, auto parts, auto logos, auto ornaments. Home: hooks, furniture, toys, handicrafts.

### 四. 产品特性 Product Features

- 具有优异的耐候性、耐化学性、缓冲性、密封性和优越的粘接性。

It has excellent weather resistance, chemical resistance, cushioning, sealing and excellent adhesion.

## 五. 典型性能 Typical performance

项目 Test items	典型值 Typical value	单位 Unit	测试方式 Test method
颜色 color	灰白黑 gray white black	-	目测 Visual inspection
胶系 Type of glue	丙烯酸酯 Acrylate adhesive	-	-
基材 Base material	PE 泡棉 PE foam	-	-
总厚度 Total thickness	3.00	mm	ASTM D-3652
剥离强度 (180° Peel strength)	20	N/inch	ASTM D-3330
保持力 Retentivity	≥24	h	ASTM D-3654
长期耐温性 Long term temperature resistance	40	°C	GB / T4851 - 2014
短期耐温性 Short term temperature resistance	60	°C	GB / T4851 - 2014

## 六. 产品规格 Product specifications

- 800mm\*33m
- 或其他定制

Other customization

## 七. 储存及保质期 Storage and shelf life

建议存放在清洁干燥的地方，防止包装破损，避免与挥发性溶剂放在一起。存储温度为4~26℃，湿度为40~50%。

It is recommended to store them in a clean and dry place to prevent package damage and volatile solvents. Suggestion storage temperature is 4~26 °C, and the suggestion humidity is 40~50%.

为保持最佳性能，本品应在生产之日起6个月内使用。

To maintain the best performance, this product should be used within 6months from the date of production.